


## Indoor Telephone Cables

# J-H(St)H Lg

J-H(St)H Lg

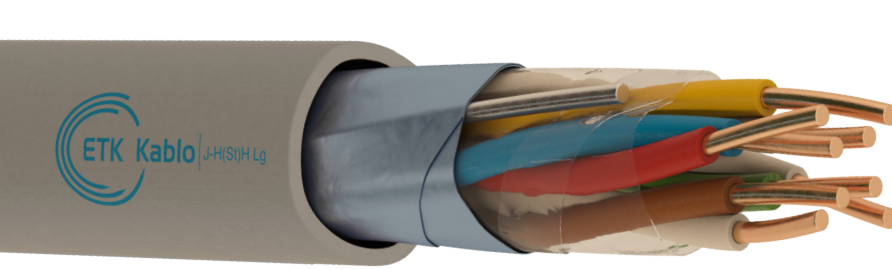

### Application

- . Feeder cable for frequency controlled motors with electromagnetic interference.
- . At instrumentation and control engineering.
- . At industrial electronics.
- . Computer and office devices.
- . Indoor communication systems.
- . Indoor sound systems.
- . Security systems.

### Cable Construction

- 1 - Conductor : Class 1 electrolytic solid copper (IEC 60228, DIN VDE 0295, EN 60228)
- 2 - Insulation : Halogen-free (VDE 0815) (EN 50290-2-26)
- 3 - Stranding : Pair stranding in layers
- 4 - Wrapping : A non-hygroscopic and dielectric polyester tape is applied on the cable core longitudinally or helically.
- 5 - Screen : Tinned copper earthing wire, Al/PET tape
- 6 - Outer Jacket: UV resistant halogen-free outer jacket. RAL 7035 (Grey) (EN 50290-2-27)

### Technical Characteristics

Conductor Diameter	Conductor Resistance $\Omega/\text{km}$ (20 °C)	Insulation Resistance $\text{M}\Omega/\text{km}$	Mutual Capacitance $\text{nF}/\text{km}$ (800 Hz)	Capacitance Unbalance $\text{pF}/500 \text{ m}$	Test Voltage $\text{V}$ (DC, 1 minute)
0.60 mm	64.6	100	100	400	800
0.80 mm	37	100	100	400	800

### Mechanical Characteristics

Bending Radius	Temperature Range Operating
10xD mm	-30°C~+70°C

### Standards

Smoke Density Test	Corrosive Gas Test	Flame Propagation Test	Flame Retardancy Test
IEC 61034-2, VDE 0482-1034-2, EN 61034-2	IEC 60754-2, VDE 0482-267-2-3, EN 50267-2-3	IEC 60332-3-24, VDE 0482-332-3-24, EN 60332-2-24	IEC 60332-1-2, VDE 0482-332-1-2, EN 60332-1-2

#### Notes

Reference Standard: DIN VDE 0815

## J-H(St)H Lg

Part Number	Pair Count	Conductor Diameter (mm)	Approx. Cable Diameter (mm)	Copper Weight (kg/km)	Approx. Weight (kg/km)	Packing Lengths (m)
3.644.1.3.3.0060.0.0001	1	0.6	4.1	7.2	22	100/500/1000
3.644.1.3.3.0060.0.0002	2	0.6	4.7	12.5	32	100/500/1000
3.644.1.3.3.0060.0.0003	3	0.6	6.1	17.8	46	100/500/1000
3.644.1.3.3.0060.0.0004	4	0.6	7.2	23.1	58	100/500/1000
3.644.1.3.3.0060.0.0005	5	0.6	7.5	28.4	69	100/500/1000
3.644.1.3.3.0060.0.0006	6	0.6	9.1	33.7	84	100/500/1000
3.644.1.3.3.0060.0.0008	8	0.6	9.3	44.3	101	100/500/1000
3.644.1.3.3.0060.0.0010	10	0.6	9.7	54.9	119	100/500/1000
3.644.1.3.3.0060.0.0012	12	0.6	11	65.6	138	100/500/1000
3.644.1.3.3.0060.0.0014	14	0.6	12	76.2	162	100/500/1000
3.644.1.3.3.0060.0.0016	16	0.6	12	86.8	180	100/500/1000
3.644.1.3.3.0060.0.0020	20	0.6	14	108	218	100/500/1000
3.644.1.3.3.0060.0.0024	24	0.6	15	129.2	259	100/500/1000
3.644.1.3.3.0060.0.0025	25	0.6	15	134.5	268	100/500/1000
3.644.1.3.3.0060.0.0030	30	0.6	19	161.1	339	100/500/1000
3.644.1.3.3.0060.0.0040	40	0.6	21	214.1	428	100/500/1000
3.644.1.3.3.0060.0.0050	50	0.6	23	267.2	518	100/500/1000
3.644.1.3.3.0060.0.0060	60	0.6	26	320.2	620	100/500/1000
3.644.1.3.3.0060.0.0080	80	0.6	29	426.3	792	100/500/1000
3.644.1.3.3.0060.0.0100	100	0.6	33	532.4	986	100/500/1000
Part Number	Pair Count	Conductor Diameter (mm)	Approx. Cable Diameter (mm)	Copper Weight (kg/km)	Approx. Weight (kg/km)	Packing Lengths (m)
3.644.1.3.3.0080.0.0001	1	0.8	4.6	11.3	29	100/500/1000
3.644.1.3.3.0080.0.0002	2	0.8	5.3	20.7	44	100/500/1000
3.644.1.3.3.0080.0.0003	3	0.8	6.9	30.2	65	100/500/1000
3.644.1.3.3.0080.0.0004	4	0.8	8.1	39.6	82	100/500/1000
3.644.1.3.3.0080.0.0005	5	0.8	8.6	49.1	98	100/500/1000
3.644.1.3.3.0080.0.0006	6	0.8	11	58.5	119	100/500/1000
3.644.1.3.3.0080.0.0008	8	0.8	11	77.3	145	100/500/1000
3.644.1.3.3.0080.0.0010	10	0.8	12	96.2	173	100/500/1000
3.644.1.3.3.0080.0.0012	12	0.8	12	115.1	199	100/500/1000
3.644.1.3.3.0080.0.0014	14	0.8	13	133.9	233	100/500/1000
3.644.1.3.3.0080.0.0016	16	0.8	14	152.8	261	100/500/1000
3.644.1.3.3.0080.0.0020	20	0.8	16	190.5	318	100/500/1000
3.644.1.3.3.0080.0.0024	24	0.8	17	228.3	379	100/500/1000
3.644.1.3.3.0080.0.0025	25	0.8	17	237.7	391	100/500/1000
3.644.1.3.3.0080.0.0030	30	0.8	22	284.8	482	100/500/1000
3.644.1.3.3.0080.0.0040	40	0.8	24	379.2	629	100/500/1000
3.644.1.3.3.0080.0.0050	50	0.8	27	473.5	766	100/500/1000
3.644.1.3.3.0080.0.0060	60	0.8	29	567.8	918	100/500/1000
3.644.1.3.3.0080.0.0080	80	0.8	33	756.4	1184	100/500/1000
3.644.1.3.3.0080.0.0100	100	0.8	37	945.1	1458	100/500/1000