



Electronic Control Cables

Signal Cables

LI2Y(St)Y

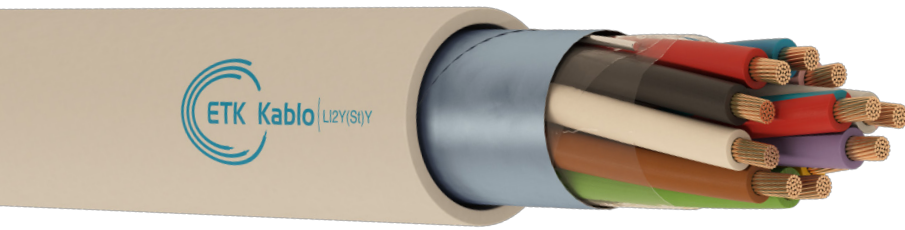

Application

- Feeder cable for frequency controlled motors with electromagnetic interference.
- At instrumentation and control engineering.
- At industrial electronics.
- Computer and office devices.
- Automation systems.
- In data transmission systems for high frequency transmission.

Cable Construction

- 1 - Conductor : Stranded electrolytic copper conductor (Class 5) (IEC 60228, EN 60228, DIN VDE 0295)
- 2 - Insulation : Solid polyethylene (EN 50290-2-23, BS 6234 Type 03 - ASTM D 1248) (DIN 47100)
- 3 - Stranding : In layers
- 4 - Wrapping : Polyester tape
- 5 - Screen : Tinned copper earthing wire, Al/PET tape
- 6 - Outer Jacket : UV resistant PVC outer jacket. RAL 7035 (Grey)

Technical Characteristics

| Cross Section | Conductor Resistance Ω/km (20 °C) | Insulation Resistance $\text{M } \Omega/\text{km}$ (20 °C) | Mutual Capacitance pF/m | Current Carrying Capacity A | Impedance Ω | Inductance mH/km | Operating Voltage V DC | Test Voltage V (DC, 1 minute) |
|----------------------|---|--|----------------------------------|--------------------------------------|--------------------|---------------------------|---------------------------------|--|
| 0.14 mm ² | 138 | 5000 | 110 | 2 | 78 | 0.67 | 250 | 1200 |
| 0.22 mm ² | 85 | 5000 | 110 | 2.5 | 78 | 0.67 | 250 | 1200 |
| 0.25 mm ² | 77.8 | 5000 | 110 | 4.5 | 78 | 0.67 | 250 | 1200 |
| 0.34 mm ² | 56 | 5000 | 110 | 6 | 78 | 0.67 | 250 | 1200 |
| 0.50 mm ² | 39 | 5000 | 120 | 9 | 78 | 0.67 | 300/500 | 2000 |
| 0.75 mm ² | 26 | 5000 | 120 | 12 | 78 | 0.67 | 300/500 | 2000 |
| 1.00 mm ² | 19.5 | 5000 | 130 | 15 | 78 | 0.67 | 300/500 | 2000 |
| 1.5 mm ² | 13.3 | 5000 | 140 | 18 | 78 | 0.67 | 300/500 | 2000 |
| 2.5 mm ² | 7.98 | 5000 | 150 | 26 | 78 | 0.67 | 300/500 | 2000 |
| 4.0 mm ² | 4.95 | 5000 | 150 | 34 | 78 | 0.67 | 300/500 | 2000 |
| 6.0 mm ² | 3.3 | 5000 | 150 | 44 | 78 | 0.67 | 300/500 | 2000 |
| 10 mm ² | 1.91 | 5000 | 150 | 61 | 78 | 0.67 | 300/500 | 2000 |
| 16 mm ² | 1.21 | 5000 | 150 | 82 | 78 | 0.67 | 300/500 | 2000 |

Mechanical Characteristics

| Bending Radius | Temperature Range Operating |
|----------------|-----------------------------|
| 7.5xD mm | -30°C--+70°C |

Standards

| Flame Retardancy Test |
|---|
| IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2 |

Notes

Electromagnetic compatibility (EMC)
Color code could be JZ, OZ, JB, OB according to customer demand.
Reference Standard: DIN VDE 0812

LI2Y(S†)Y

| Part Number | Conductor Count | Conductor Cross-section (mm ²) | Approx. Cable Diameter (mm) | Copper Weight (kg/km) | Approx. Weight (kg/km) | Packing Lengths (m) |
|------------------------|-----------------|--|-----------------------------|-----------------------|------------------------|---------------------|
| 3.540.31.2.0022.0.0002 | 2 | 0.22 | 4 | 6.5 | 19 | 100/500/1000 |
| 3.540.31.2.0022.0.0003 | 3 | 0.22 | 4.2 | 8.6 | 22 | 100/500/1000 |
| 3.540.31.2.0022.0.0004 | 4 | 0.22 | 4.5 | 10.8 | 26 | 100/500/1000 |
| 3.540.31.2.0022.0.0005 | 5 | 0.22 | 5 | 12.9 | 31 | 100/500/1000 |
| 3.540.31.2.0022.0.0006 | 6 | 0.22 | 5.3 | 15 | 35 | 100/500/1000 |
| 3.540.31.2.0022.0.0007 | 7 | 0.22 | 5.3 | 17.1 | 38 | 100/500/1000 |
| 3.540.31.2.0022.0.0008 | 8 | 0.22 | 5.8 | 19.3 | 43 | 100/500/1000 |
| 3.540.31.2.0022.0.0009 | 9 | 0.22 | 6.3 | 21.4 | 49 | 100/500/1000 |
| 3.540.31.2.0022.0.0010 | 10 | 0.22 | 6.7 | 23.5 | 54 | 100/500/1000 |
| 3.540.31.2.0022.0.0012 | 12 | 0.22 | 6.9 | 27.8 | 60 | 100/500/1000 |
| 3.540.31.2.0022.0.0014 | 14 | 0.22 | 7.3 | 32.1 | 69 | 100/500/1000 |
| 3.540.31.2.0022.0.0016 | 16 | 0.22 | 7.8 | 36.3 | 78 | 100/500/1000 |
| 3.540.31.2.0022.0.0018 | 18 | 0.22 | 8.1 | 40.6 | 85 | 100/500/1000 |
| 3.540.31.2.0022.0.0019 | 19 | 0.22 | 8.1 | 42.7 | 88 | 100/500/1000 |
| 3.540.31.2.0022.0.0020 | 20 | 0.22 | 8.6 | 44.9 | 95 | 100/500/1000 |
| 3.540.31.2.0022.0.0021 | 21 | 0.22 | 8.6 | 47 | 98 | 100/500/1000 |
| 3.540.31.2.0022.0.0024 | 24 | 0.22 | 9.5 | 53.4 | 112 | 100/500/1000 |
| 3.540.31.2.0022.0.0025 | 25 | 0.22 | 9.5 | 55.5 | 115 | 100/500/1000 |
| 3.540.31.2.0022.0.0027 | 27 | 0.22 | 9.7 | 59.8 | 122 | 100/500/1000 |
| Part Number | Conductor Count | Conductor Cross-section (mm ²) | Approx. Cable Diameter (mm) | Copper Weight (kg/km) | Approx. Weight (kg/km) | Packing Lengths (m) |
| 3.540.31.2.0025.0.0002 | 2 | 0.25 | 4.2 | 7 | 20 | 100/500/1000 |
| 3.540.31.2.0025.0.0003 | 3 | 0.25 | 4.4 | 9.4 | 24 | 100/500/1000 |
| 3.540.31.2.0025.0.0004 | 4 | 0.25 | 4.8 | 11.8 | 28 | 100/500/1000 |
| 3.540.31.2.0025.0.0005 | 5 | 0.25 | 5.3 | 14.2 | 34 | 100/500/1000 |
| 3.540.31.2.0025.0.0006 | 6 | 0.25 | 5.6 | 16.6 | 39 | 100/500/1000 |
| 3.540.31.2.0025.0.0007 | 7 | 0.25 | 5.3 | 19 | 39 | 100/500/1000 |
| 3.540.31.2.0025.0.0008 | 8 | 0.25 | 6.1 | 21.4 | 48 | 100/500/1000 |
| 3.540.31.2.0025.0.0009 | 9 | 0.25 | 6.6 | 23.8 | 54 | 100/500/1000 |
| 3.540.31.2.0025.0.0010 | 10 | 0.25 | 7.1 | 26.2 | 60 | 100/500/1000 |
| 3.540.31.2.0025.0.0012 | 12 | 0.25 | 7.3 | 31 | 67 | 100/500/1000 |
| 3.540.31.2.0025.0.0014 | 14 | 0.25 | 7.8 | 35.8 | 77 | 100/500/1000 |
| 3.540.31.2.0025.0.0016 | 16 | 0.25 | 8.3 | 40.6 | 87 | 100/500/1000 |
| 3.540.31.2.0025.0.0018 | 18 | 0.25 | 8.6 | 45.4 | 95 | 100/500/1000 |
| 3.540.31.2.0025.0.0019 | 19 | 0.25 | 8.6 | 47.8 | 98 | 100/500/1000 |
| 3.540.31.2.0025.0.0020 | 20 | 0.25 | 9.1 | 50.2 | 106 | 100/500/1000 |
| 3.540.31.2.0025.0.0021 | 21 | 0.25 | 9.1 | 52.6 | 108 | 100/500/1000 |
| 3.540.31.2.0025.0.0024 | 24 | 0.25 | 11 | 59.8 | 125 | 100/500/1000 |
| 3.540.31.2.0025.0.0025 | 25 | 0.25 | 11 | 62.2 | 129 | 100/500/1000 |
| 3.540.31.2.0025.0.0027 | 27 | 0.25 | 11 | 67 | 136 | 100/500/1000 |

LI2Y(Sf)Y

| Part Number | Conductor Count | Conductor Cross-section (mm ²) | Approx. Cable Diameter (mm) | Copper Weight (kg/km) | Approx. Weight (kg/km) | Packing Lengths (m) |
|------------------------|-----------------|--|-----------------------------|-----------------------|------------------------|---------------------|
| 3.540.31.2.0034.0.0002 | 2 | 0.34 | 4.8 | 8.9 | 26 | 100/500/1000 |
| 3.540.31.2.0034.0.0003 | 3 | 0.34 | 5.1 | 12.2 | 31 | 100/500/1000 |
| 3.540.31.2.0034.0.0004 | 4 | 0.34 | 5.5 | 15.6 | 37 | 100/500/1000 |
| 3.540.31.2.0034.0.0005 | 5 | 0.34 | 6 | 18.9 | 45 | 100/500/1000 |
| 3.540.31.2.0034.0.0006 | 6 | 0.34 | 6.4 | 22.2 | 51 | 100/500/1000 |
| 3.540.31.2.0034.0.0007 | 7 | 0.34 | 6.4 | 25.6 | 55 | 100/500/1000 |
| 3.540.31.2.0034.0.0008 | 8 | 0.34 | 7 | 28.9 | 63 | 100/500/1000 |
| 3.540.31.2.0034.0.0009 | 9 | 0.34 | 8 | 32.2 | 72 | 100/500/1000 |
| 3.540.31.2.0034.0.0010 | 10 | 0.34 | 8.1 | 35.5 | 79 | 100/500/1000 |
| 3.540.31.2.0034.0.0012 | 12 | 0.34 | 8.4 | 42.2 | 89 | 100/500/1000 |
| 3.540.31.2.0034.0.0014 | 14 | 0.34 | 8.9 | 48.9 | 101 | 100/500/1000 |
| 3.540.31.2.0034.0.0016 | 16 | 0.34 | 9.3 | 55.5 | 112 | 100/500/1000 |
| 3.540.31.2.0034.0.0018 | 18 | 0.34 | 9.8 | 62.2 | 126 | 100/500/1000 |
| 3.540.31.2.0034.0.0019 | 19 | 0.34 | 9.8 | 65.5 | 130 | 100/500/1000 |
| 3.540.31.2.0034.0.0020 | 20 | 0.34 | 11 | 68.9 | 140 | 100/500/1000 |
| 3.540.31.2.0034.0.0021 | 21 | 0.34 | 11 | 72.2 | 144 | 100/500/1000 |
| 3.540.31.2.0034.0.0024 | 24 | 0.34 | 12 | 82.2 | 169 | 100/500/1000 |
| 3.540.31.2.0034.0.0025 | 25 | 0.34 | 12 | 85.5 | 173 | 100/500/1000 |
| 3.540.31.2.0034.0.0027 | 27 | 0.34 | 12 | 92.2 | 183 | 100/500/1000 |
| Part Number | Conductor Count | Conductor Cross-section (mm ²) | Approx. Cable Diameter (mm) | Copper Weight (kg/km) | Approx. Weight (kg/km) | Packing Lengths (m) |
| 3.540.31.2.0050.0.0002 | 2 | 0.5 | 5.3 | 11 | 31 | 100/500/1000 |
| 3.540.31.2.0050.0.0003 | 3 | 0.5 | 5.6 | 15.4 | 38 | 100/500/1000 |
| 3.540.31.2.0050.0.0004 | 4 | 0.5 | 6 | 19.8 | 46 | 100/500/1000 |
| 3.540.31.2.0050.0.0005 | 5 | 0.5 | 6.5 | 24.2 | 55 | 100/500/1000 |
| 3.540.31.2.0050.0.0006 | 6 | 0.5 | 7.1 | 28.6 | 65 | 100/500/1000 |
| 3.540.31.2.0050.0.0007 | 7 | 0.5 | 7.1 | 33 | 69 | 100/500/1000 |
| 3.540.31.2.0050.0.0008 | 8 | 0.5 | 7.9 | 37.4 | 83 | 100/500/1000 |
| 3.540.31.2.0050.0.0009 | 9 | 0.5 | 8.9 | 41.8 | 94 | 100/500/1000 |
| 3.540.31.2.0050.0.0010 | 10 | 0.5 | 9 | 46.2 | 98 | 100/500/1000 |
| 3.540.31.2.0050.0.0012 | 12 | 0.5 | 9.4 | 55 | 113 | 100/500/1000 |
| 3.540.31.2.0050.0.0014 | 14 | 0.5 | 9.9 | 63.8 | 130 | 100/500/1000 |
| 3.540.31.2.0050.0.0016 | 16 | 0.5 | 11 | 72.6 | 144 | 100/500/1000 |
| 3.540.31.2.0050.0.0018 | 18 | 0.5 | 11 | 81.4 | 161 | 100/500/1000 |
| 3.540.31.2.0050.0.0019 | 19 | 0.5 | 11 | 85.8 | 164 | 100/500/1000 |
| 3.540.31.2.0050.0.0020 | 20 | 0.5 | 12 | 90.2 | 180 | 100/500/1000 |
| 3.540.31.2.0050.0.0021 | 21 | 0.5 | 12 | 94.6 | 182 | 100/500/1000 |
| 3.540.31.2.0050.0.0024 | 24 | 0.5 | 13 | 107.8 | 205 | 100/500/1000 |
| 3.540.31.2.0050.0.0025 | 25 | 0.5 | 13 | 112.2 | 222 | 100/500/1000 |
| 3.540.31.2.0050.0.0027 | 27 | 0.5 | 14 | 121 | 231 | 100/500/1000 |

LI2Y(Sf)Y

| Part Number | Conductor Count | Conductor Cross-section (mm ²) | Approx. Cable Diameter (mm) | Copper Weight (kg/km) | Approx. Weight (kg/km) | Packing Lengths (m) |
|-------------------------|-----------------|--|-----------------------------|-----------------------|------------------------|---------------------|
| 3.540.3.1.2.0075.0.0002 | 2 | 0.75 | 6 | 17.7 | 42 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0003 | 3 | 0.75 | 6.3 | 24.3 | 51 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0004 | 4 | 0.75 | 6.9 | 30.9 | 63 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0005 | 5 | 0.75 | 7.5 | 37.5 | 77 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0006 | 6 | 0.75 | 8.1 | 44.1 | 89 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0007 | 7 | 0.75 | 8.1 | 50.7 | 95 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0008 | 8 | 0.75 | 8.9 | 57.3 | 113 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0009 | 9 | 0.75 | 11 | 63.9 | 128 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0010 | 10 | 0.75 | 11 | 70.5 | 133 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0012 | 12 | 0.75 | 11 | 83.7 | 154 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0014 | 14 | 0.75 | 12 | 96.9 | 175 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0016 | 16 | 0.75 | 12 | 110.1 | 195 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0018 | 18 | 0.75 | 13 | 123.3 | 220 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0019 | 19 | 0.75 | 13 | 129.9 | 226 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0020 | 20 | 0.75 | 13 | 136.5 | 242 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0021 | 21 | 0.75 | 13 | 143.1 | 246 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0024 | 24 | 0.75 | 15 | 162.9 | 285 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0025 | 25 | 0.75 | 15 | 169.5 | 299 | 100/500/1000 |
| 3.540.3.1.2.0075.0.0027 | 27 | 0.75 | 15 | 182.7 | 311 | 100/500/1000 |
| Part Number | Conductor Count | Conductor Cross-section (mm ²) | Approx. Cable Diameter (mm) | Copper Weight (kg/km) | Approx. Weight (kg/km) | Packing Lengths (m) |
| 3.540.3.1.2.0100.0.0002 | 2 | 1 | 6.4 | 21 | 47 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0003 | 3 | 1 | 6.7 | 29.3 | 59 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0004 | 4 | 1 | 7.3 | 37.5 | 73 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0005 | 5 | 1 | 8 | 45.7 | 90 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0006 | 6 | 1 | 8.7 | 54 | 104 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0007 | 7 | 1 | 8.7 | 62.2 | 111 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0008 | 8 | 1 | 9.5 | 70.5 | 132 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0009 | 9 | 1 | 11 | 78.7 | 150 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0010 | 10 | 1 | 11 | 87 | 157 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0012 | 12 | 1 | 12 | 103.5 | 182 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0014 | 14 | 1 | 12 | 120 | 208 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0016 | 16 | 1 | 13 | 136.5 | 232 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0018 | 18 | 1 | 14 | 153 | 262 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0019 | 19 | 1 | 14 | 161.3 | 269 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0020 | 20 | 1 | 15 | 169.5 | 289 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0021 | 21 | 1 | 15 | 177.8 | 293 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0024 | 24 | 1 | 16 | 202.5 | 336 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0025 | 25 | 1 | 16 | 210.8 | 353 | 100/500/1000 |
| 3.540.3.1.2.0100.0.0027 | 27 | 1 | 16 | 227.3 | 368 | 100/500/1000 |

LI2Y(Sf)Y

| Part Number | Conductor Count | Conductor Cross-section (mm ²) | Approx. Cable Diameter (mm) | Copper Weight (kg/km) | Approx. Weight (kg/km) | Packing Lengths (m) |
|-------------------------|-----------------|--|-----------------------------|-----------------------|------------------------|---------------------|
| 3.540.3.1.2.0150.0.0002 | 2 | 1.5 | 6.9 | 30.2 | 60 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0003 | 3 | 1.5 | 7.2 | 43.1 | 76 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0004 | 4 | 1.5 | 7.9 | 55.9 | 95 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0005 | 5 | 1.5 | 8.7 | 68.8 | 117 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0006 | 6 | 1.5 | 9.4 | 81.6 | 137 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0007 | 7 | 1.5 | 9.4 | 94.5 | 147 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0008 | 8 | 1.5 | 11 | 107.3 | 174 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0009 | 9 | 1.5 | 12 | 120.2 | 198 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0010 | 10 | 1.5 | 12 | 133.1 | 208 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0012 | 12 | 1.5 | 13 | 158.8 | 242 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0014 | 14 | 1.5 | 13 | 184.5 | 278 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0016 | 16 | 1.5 | 14 | 210.2 | 311 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0018 | 18 | 1.5 | 15 | 235.9 | 352 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0019 | 19 | 1.5 | 15 | 248.8 | 362 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0020 | 20 | 1.5 | 16 | 261.7 | 388 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0021 | 21 | 1.5 | 16 | 274.5 | 396 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0024 | 24 | 1.5 | 17 | 313.1 | 457 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0025 | 25 | 1.5 | 17 | 326 | 480 | 100/500/1000 |
| 3.540.3.1.2.0150.0.0027 | 27 | 1.5 | 18 | 351.7 | 503 | 100/500/1000 |
| Part Number | Conductor Count | Conductor Cross-section (mm ²) | Approx. Cable Diameter (mm) | Copper Weight (kg/km) | Approx. Weight (kg/km) | Packing Lengths (m) |
| 3.540.3.1.2.0250.0.0002 | 2 | 2.5 | 8.3 | 47.4 | 86 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0003 | 3 | 2.5 | 8.8 | 68.8 | 112 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0004 | 4 | 2.5 | 9.6 | 90.2 | 142 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0005 | 5 | 2.5 | 11 | 111.6 | 177 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0006 | 6 | 2.5 | 12 | 133.1 | 209 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0007 | 7 | 2.5 | 12 | 154.5 | 227 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0008 | 8 | 2.5 | 13 | 175.9 | 269 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0009 | 9 | 2.5 | 15 | 197.4 | 305 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0010 | 10 | 2.5 | 15 | 218.8 | 322 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0012 | 12 | 2.5 | 16 | 261.7 | 377 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0014 | 14 | 2.5 | 17 | 304.5 | 434 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0016 | 16 | 2.5 | 17 | 347.4 | 488 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0018 | 18 | 2.5 | 18 | 390.2 | 553 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0019 | 19 | 2.5 | 18 | 411.7 | 570 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0020 | 20 | 2.5 | 19 | 433.1 | 613 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0021 | 21 | 2.5 | 19 | 454.5 | 625 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0024 | 24 | 2.5 | 22 | 518.8 | 721 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0025 | 25 | 2.5 | 22 | 540.3 | 759 | 100/500/1000 |
| 3.540.3.1.2.0250.0.0027 | 27 | 2.5 | 22 | 583.1 | 797 | 100/500/1000 |