


Data/LAN Cables

Cat 6 U/UTP LSOH SWA LSOH

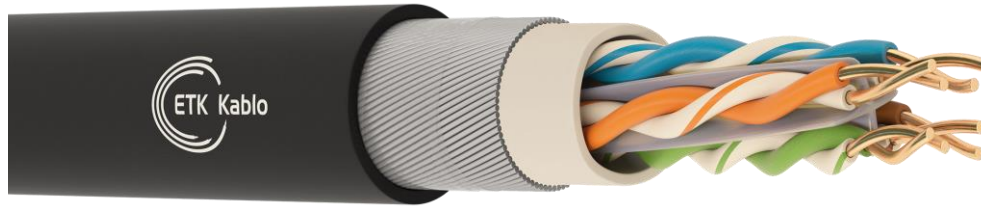

Application

- ISDN
- 4/6 Mbps Token Ring (IEEE 802.5)
- 100 Mbps CDDI
- 250 Mbps ATM Power over Ethernet (PoE)
- 10 BASE-T Ethernet (IEEE 802.3j)
- 100 BASE-VG AnyLAN (IEEE 802.12)
- 1000 BASE-T 1 Gigabit Ethernet (IEEE 802.3 ab)

Cable Construction

- | | | |
|------------------|---|---|
| 1 - Conductor | : | Electrolytic solid copper conductor |
| 2 - Insulation | : | Solid polyethylene insulation |
| 3 - Stranding | : | Insulations are stranded into pairs |
| 4 - Separator | : | Pairs are stranded together with star shaped separator |
| 5 - Inner Jacket | : | Halogen-free inner jacket, RAL 7035 (Grey) |
| 6 - Armour | : | Steel wire armour |
| 7 - Outer Jacket | : | UV resistant halogen-free outer jacket, RAL 7035 (Grey) |

Technical Characteristics

Conductor Resistance Ω/km (20 °C)	Insulation Resistance $\text{M}\Omega/\text{km}$ (20 °C)	Mutual Capacitance nF/km	Capacitance Unbalance %	Propagation Velocity %	Characteristic Impedance Ω (1-250 MHz)	Operating Voltage V DC	Test Voltage V (DC. 1 minute)
Max. 94	5000	Max. 56	%2	%67-69	100 $\pm$ %15	250	1200

Mechanical Characteristics

Bending Radius	Temperature Range Operating
8.0xD mm	-20°C ~ +60°C

Standards

Manufacturing	Smoke Density Test	Flame Propagation Test	Corrosive Gas Test	Halogen-free Test
ANSI/TIA-568-C.2, IEC-61156-5, IEC-11801	IEC 61034-2, VDE 0482-1034-2, BS EN 61034-2	IEC 60332-3-24, VDE 0482-332-3-31, BS EN 60332-3-24	IEC 60754-2, VDE 0482-267-2-3, BS EN 50267-2-3	IEC 60754-1, VDE 0482-267-2-1, BS EN 50267-2-1

Electrical Properties

Frequency MHz	Insertion Loss $\text{dB}/100\text{m}$ (Max.)	Near-end Crosstalk (NEXT) dB (Min.)	Power-sum Near-end Crosstalk (PSNEXT) dB (Min.)	Equal-level Far-end Crosstalk (ELFEXT) $\text{dB}/100\text{m}$ (Min.)	Power-sum Equal Level Far-end Crosstalk (PSELFEXT) $\text{dB}/100\text{m}$ (Min.)	Return Loss (RL) dB (Min.)
1	2	74.3	72.3	67.8	64.8	20
4	3.8	65.3	63.3	55.8	52.8	23
8	5.3	60.8	58.8	49.7	46.7	24.5
10	6	59.3	57.3	47.8	44.8	25
16	7.6	56.2	54.2	43.7	40.7	25
20	8.5	54.8	52.8	41.8	38.8	24.3
25	9.5	53.3	51.3	39.8	36.8	23.6
31.25	10.7	51.9	49.9	37.9	34.9	21.5
62.5	15.4	47.4	45.4	31.9	28.9	20.1
100	19.8	44.3	42.3	27.8	24.8	18
200	29	39.8	37.8	21.8	18.8	17.3
250	32.8	38.3	36.3	19.8	16.8	16.8

Cat 6 U/UTP LSOH SWA LSOH

Part Number	Pair Count	Conductor Diameter (AWG)	Approx. Cable Diameter (mm)	Copper Weight (kg/km)	Approx. Weight (kg/km)	Packing Lengths (m)
3.4605.02.1.0.3.3 0.A1Db.04	4	23	10.9	18.2	230	305/500/1000