


## Fiber Optic Cables

# SLT-NMA-SHFJ-(GY12)

U-DQ(ZN)H

Single loose tube, non-metallic armor fiber optic cable.

RoHS REACH CE

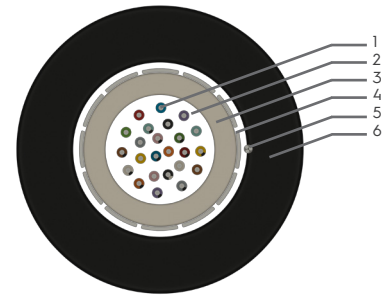

### Application

- Easy and fast installation due to its small diameter and light construction.
- Suitable for pushing, blowing method.
- Indoor and duct type applications; low smoke, zero halogen.
- Problem-free use in power lines due to its non-metallic construction.
- In network systems, MAN, WAN, LAN applications.
- Rodent protection.

### Cable Construction

- 1 - Optical fiber core <sup>1</sup>
- 2 - Waterproof thixotropic jelly
- 3 - PBT Tube
- 4 - Non-metallic strength member (Glass yarn)
- 5 - Ripcord
- 6 - UV resistant halogen-free (LSOH) outer jacket

### Mechanical and Environmental Characteristics

	Test Standard	Specified Value	Acceptance Criteria
Maximum Installation Tension <sup>2</sup>	IEC 60794-1-2-E1	1.0 x W(N), min. 1200 N	Fiber strain ≤ 0.33%
Maximum Operation Tension	IEC 60794-1-2-E1	0.5 x W(N), min. 600 N	Δa ≤ 0.05 dB, No fiber strain
Crush Strength	IEC 60794-1-2-E3	1500 N / 100 mm, max. 15 min.	Δa ≤ 0.05 dB, No damage
Impact	IEC 60794-1-2-E4	10 Nm, 3 impacts, R= 300 mm	Δa ≤ 0.05 dB after the test
Torsion	IEC 60794-1-2-E7	1 m. 100N, +/- 180°, 10 cycles	Δa ≤ 0.05 dB, No damage
Repeated Bending	IEC 60794-1-2-E6	R=20x D, 100 N, 35 cycles	No damage
Bending Radius	IEC 60794-1-2-E11	R=20x D, 4 turns, 3 cycles	Δa ≤ 0.05 dB, No damage
Temperature Cycling	IEC 60794-1-2-F1	-20°C to +70°C	Δa ≤ 0.05 dB/km
Waterproofness	IEC 60794-1-2-F5B	Sample= 3 m, water column= 1 m	No water leakage in 24 hours.

### Application

	Minimum Bending Radius		Temperature Range		
Operation	20 x cable Ø	Storage	-25 to +70°C	Installation	-10 to +60°C
Fixed	15 x cable Ø	Transport	-25 to +70°C	Operating	-20 to +70°C

### Marking, Packing, Delivery Lengths

Marking	ETK Kablo <Date of Manufacture> <Fiber Count and Type> <Length Marking>
Packing	Wooden drum with protection
Delivery Lengths	2 km, 4 km ± %5 tolerance

### Test Standards

Low Smoke Test	Non-corrosiveness Test	Flame Retardancy Test
IEC 61034, EN 50268	IEC 60754, EN 50267	IEC 60332-1

#### Notes

<sup>1</sup> Optical fiber core could be applied as G.652.D, G.655, G.657.A1, G.657.A2, OM1, OM2, OM3, OM4 according to customer demand.

<sup>2</sup> Maximum tensile strength could be changed according to customer demand.

Manufacturing Standard: TS EN 60794-3-12

## SLT-NMA-SHFJ-(GY12)

Part Number	Core Type	Core Count	Tube Count	Tube Diameter (mm)	Cable Diameter (mm)	Cable Weight (kg/km)
3.200.0.6.3.0900.0.0002	SM G.652.D	2	1	3.4	7.1	54
3.200.0.6.3.0900.0.0004	SM G.652.D	4	1	3.4	7.1	54
3.200.0.6.3.0900.0.0006	SM G.652.D	6	1	3.4	7.1	54
3.200.0.6.3.0900.0.0008	SM G.652.D	8	1	3.4	7.1	54
3.200.0.6.3.0900.0.0012	SM G.652.D	12	1	3.4	7.1	53
3.200.0.6.3.0900.0.0016	SM G.652.D	16	1	4.2	8.0	69
3.200.0.6.3.0900.0.0020	SM G.652.D	20	1	4.2	8.0	68
3.200.0.6.3.0900.0.0024	SM G.652.D	24	1	4.2	8.0	68
Part Number	Core Type	Core Count	Tube Count	Tube Diameter (mm)	Cable Diameter (mm)	Cable Weight (kg/km)
3.200.0.6.3.0625.0.0002	OM1	2	1	3.4	7.1	54
3.200.0.6.3.0625.0.0004	OM1	4	1	3.4	7.1	54
3.200.0.6.3.0625.0.0006	OM1	6	1	3.4	7.1	54
3.200.0.6.3.0625.0.0008	OM1	8	1	3.4	7.1	54
3.200.0.6.3.0625.0.0012	OM1	12	1	3.4	7.1	54
3.200.0.6.3.0625.0.0016	OM1	16	1	4.2	8.0	69
3.200.0.6.3.0625.0.0020	OM1	20	1	4.2	8.0	69
3.200.0.6.3.0625.0.0024	OM1	24	1	4.2	8.0	69
Part Number	Core Type	Core Count	Tube Count	Tube Diameter (mm)	Cable Diameter (mm)	Cable Weight (kg/km)
3.200.0.6.3.0502.0.0002	OM2	2	1	3.4	7.1	54
3.200.0.6.3.0502.0.0004	OM2	4	1	3.4	7.1	54
3.200.0.6.3.0502.0.0006	OM2	6	1	3.4	7.1	54
3.200.0.6.3.0502.0.0008	OM2	8	1	3.4	7.1	54
3.200.0.6.3.0502.0.0012	OM2	12	1	3.4	7.1	54
3.200.0.6.3.0502.0.0016	OM2	16	1	4.2	8.0	69
3.200.0.6.3.0502.0.0020	OM2	20	1	4.2	8.0	69
3.200.0.6.3.0502.0.0024	OM2	24	1	3.8	8.0	69
Part Number	Core Type	Core Count	Tube Count	Tube Diameter (mm)	Cable Diameter (mm)	Cable Weight (kg/km)
3.200.0.6.3.0503.0.0002	OM3	2	1	3.4	7.1	54
3.200.0.6.3.0503.0.0004	OM3	4	1	3.4	7.1	54
3.200.0.6.3.0503.0.0006	OM3	6	1	3.4	7.1	54
3.200.0.6.3.0503.0.0008	OM3	8	1	3.4	7.1	54
3.200.0.6.3.0503.0.0012	OM3	12	1	3.4	7.1	54
3.200.0.6.3.0503.0.0016	OM3	16	1	4.2	8.0	69
3.200.0.6.3.0503.0.0020	OM3	20	1	4.2	8.0	69
3.200.0.6.3.0503.0.0024	OM3	24	1	4.2	8.0	69
Part Number	Core Type	Core Count	Tube Count	Tube Diameter (mm)	Cable Diameter (mm)	Cable Weight (kg/km)
3.200.0.6.3.0504.0.0002	OM4	2	1	3.4	7.1	54
3.200.0.6.3.0504.0.0004	OM4	4	1	3.4	7.1	54
3.200.0.6.3.0504.0.0006	OM4	6	1	3.4	7.1	54
3.200.0.6.3.0504.0.0008	OM4	8	1	3.4	7.1	54
3.200.0.6.3.0504.0.0012	OM4	12	1	3.4	7.1	54
3.200.0.6.3.0504.0.0016	OM4	16	1	4.2	8.0	69
3.200.0.6.3.0504.0.0020	OM4	20	1	4.2	8.0	69
3.200.0.6.3.0504.0.0024	OM4	24	1	4.2	8.0	69